

## TRIAC/0-10V/1-10V/POTENTIOMETER/10V PWM

DEM SERIES indoor/outdoor drivers are highly efficient, stable with smooth dimming capability compatible with most TRIAC, ELV, MLV, 0-10V reverse and forward phase dimmers, and on/off switches. These drivers are factory derated which allows them to be loaded to maximum wattage capacity. The wet/dry housings are IP66 rated designed to fit most installations.



## FEATURES

- Output constant voltage
- UL cUL listed, Class 2, Class P, Type HL, FCC, NEMA 4X, CE, RoHs
- Universal input, 110-277Vac
- Build in active PFC, typical power factor >0.95
- THD < 20% @ 120V Max. load
- High efficiency : up to 90%
- Load: 0.01-100%
- Short-circuit, over-temperature, over-load protection
- Full protection metal case, for dry, damp, wet location
- Flicker-free
- Suitable for LED lighting and moving sign applications



## PRODUCT ADVANTAGES


- Dim-all: Triac/0-10V/1-10V/10V PWM/Potentiometer
- Switch to PWM or Voltage Reduce output
- Dimming effect: Voltage Reduce mode: 100%-0.01% dim, stepless dimming, flicker-free | PWM dim mode: 100-0.1% dim, flicker-free
- Triac dim mode: Forward phase & reverse phase, MLV, ELV dim
- Exclusive patent design of "Clamshell" junction box, low-profile logo
- Flexible wiring compartment to adjust the AC and DC wiring space
- Metal shell NEMA 4X for indoor and outdoor use; Wet, damp, and dry location
- Title 24 JA8 compliant
- Constant voltage type, fine tune of output voltage
- Super low loading request, works perfect at 0.01-100% load.
- 7 years warranty
- Dimming range: 100%-0.01% Ultra Deep Amplitude
- No Vpeak-peak during driver on/off and dimming, no harm to the LED for long-term using, and slow down the speed of lumen depreciation.
- Works with single channel CCT warm-dim LED strip/tape (2 wires).
- Switching different output mode, can be compatible with more different types of LED lamps
- Compatible with DC-DC design LED fixture, such as MR16, PAR, wall washer, linear lighting, LED strip/type

## SPECIFICATIONS


Model	SL-TR-DEM150W-12V	SL-TR-DEM150W-24V	SL-TR-DEM150W-36V	SL-TR-DEM150W-48V	
<b>Certificates</b>	UL, cUL listed, Type HL rated, FCC NEMA 4X				
<b>Output</b>	DC Voltage	12V	24V	36V	48V
	Rated Current	12.5A	6.25A	4.16A	3.125A
	Rated Power	150W	150W	150W	150W
	Voltage Tolerance	±0.5V			
	Voltage Regulation	±0.5V			
	Load Regulation	±2%   +1%			1%
<b>Input</b>	Voltage Range	110-277VAC			
	Frequency Range	47-63Hz			
	Power Factor (Typ.) @ full load	0.99@120VAC 0.96@277VAC			
	THD (Typ.) @ full load	<20% @120VAC &277VAC			
	Efficiency (Typ.) @ full load	87% @120Vac 90%@277Vac			
	AC Current (Max.	1.8A@110Vac			
	Inrush Current (Typ.)	15A, 50%, 1.4ms @120VAC; 30A, 50% 1.4ms @277VAC			
Leakage current	<0.50mA				
<b>Protection</b>	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed.			
	Over Loading	≤120% Hiccup mode, recovers automatically after fault condition is removed			
	Over temperature	100°C±10°C shut down o/p voltage, automatically recover after cooling.			
<b>Environment</b>	Working TEMP.	-40~+60°C (see below derating curve)			
	Working Humidity	20~90%RH, non-condensing			
	Storage TEMP. Humidity	-40~+80°C, 10~95%RH			
	TEMP. coefficient	±0.03%/°C (0~50°C)			
	Vibration	10~500Hz, 5G 10min./1 cycle,period for 60min. each along X,Y,Z axes			
<b>Safety &amp; EMC</b>	Safety standards	UL8750+UL1310			
	Withstand voltage	I/P-O/P:1.88KVAC			
	Isolation resistance	I/P-O/P:100MΩ/500VDC/25°C/70%RH			
	EMC EMISSION	FCC Part 15 B			
<b>Others</b>	Net. Weight	1.8Kg			
	Size	254*132*42.5mm (L*W*H)			
	packing	10PCS/CTN,Packing size:300*285*250mm			
<b>Notes</b>	1. All parameters if NOT specially mentioned are measured at 120VAC input , rated load and 25°Cof ambient temperature. 2. To extend the driver's using life ,please reduce the loading at lower input voltage.				

## DERATING CURVE

To extend their life, please refer to the Derating Curve and derate according to the temperature.

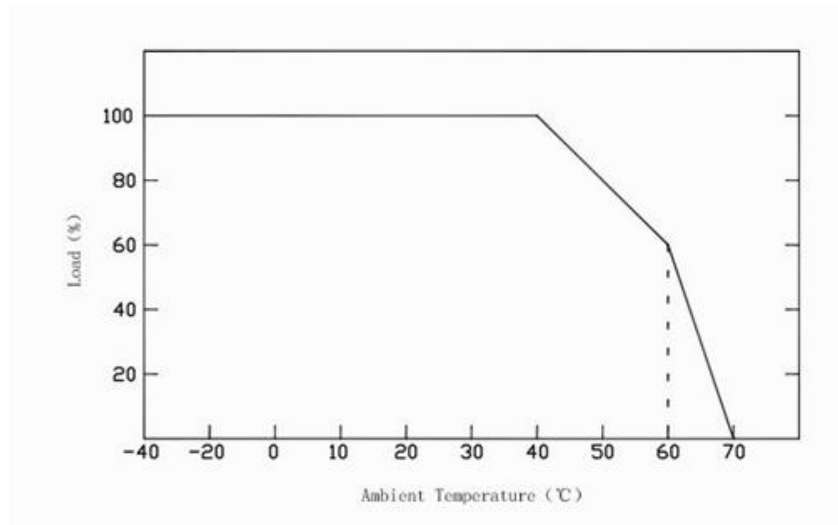

## MECHANICAL SPECIFICATION

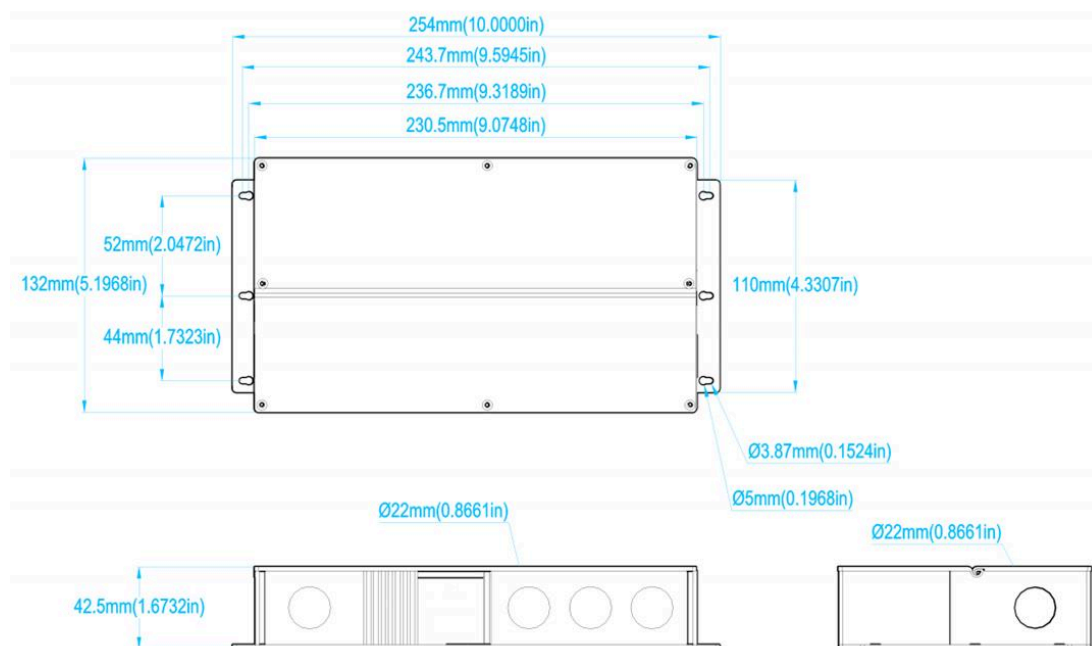

- Input wire Black and White to be connected to AC L and N ,Green wire go ground,
- Output wire Red to LED Positive side (+) , Black to LED Negative side (-).
- Dimming cable DIM (+) Purple to 0/1-10V dimmer signal(+ ) ,DIM (-) Pink to 0/1-10V dimmer signal (-)
- Please make sure your connect these correctly otherwise your product will not function correctly and could be damaged.


**Note: Any other requests we can customized.**

## CONNECTING DIAGRAM


### Using TRIAC/Phase cut dimming

1. The Pulse-Width Modulation (PWM) of output voltage can be adjusted through input terminal of the AC phase line(L) by connection a phase /Triac dimmer of lighting system.
2. Work with forward phase /leading edge ,MLV and reverse phase /trailing edge ,ELV,TRIAC dimmers.
3. Please try to use dimmers with power at least 1.5 times as the output power of the driver.

### Using Triac MLV wiring diagram

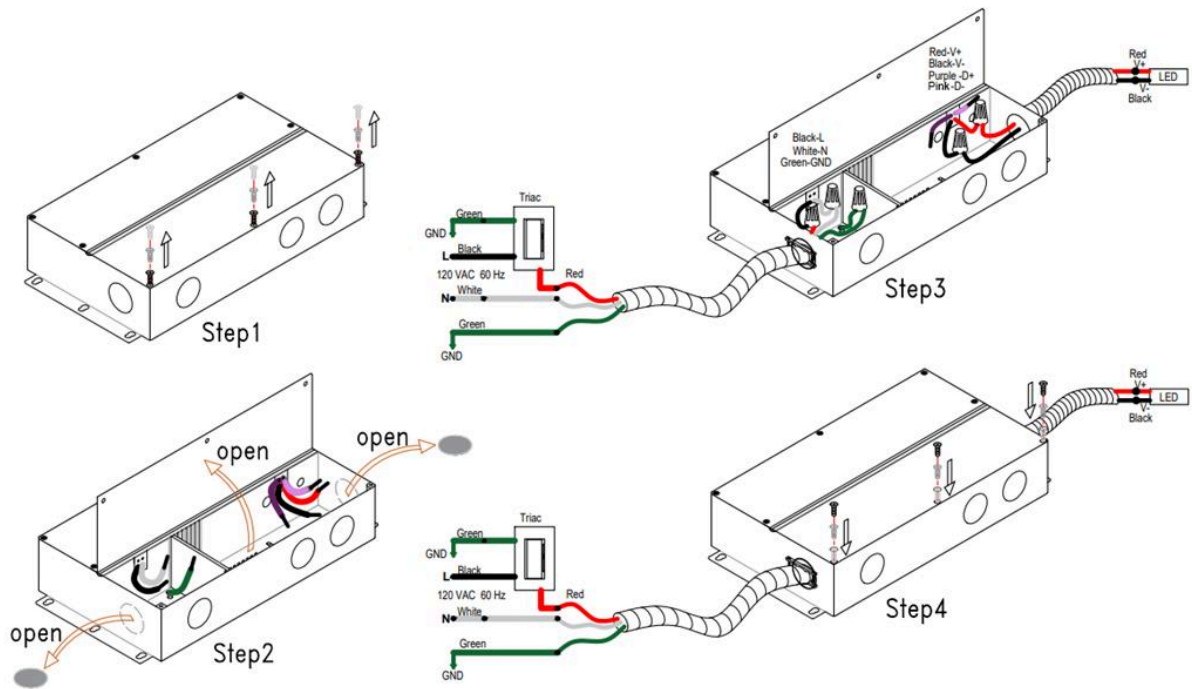


### Using Triac ELV wiring diagram

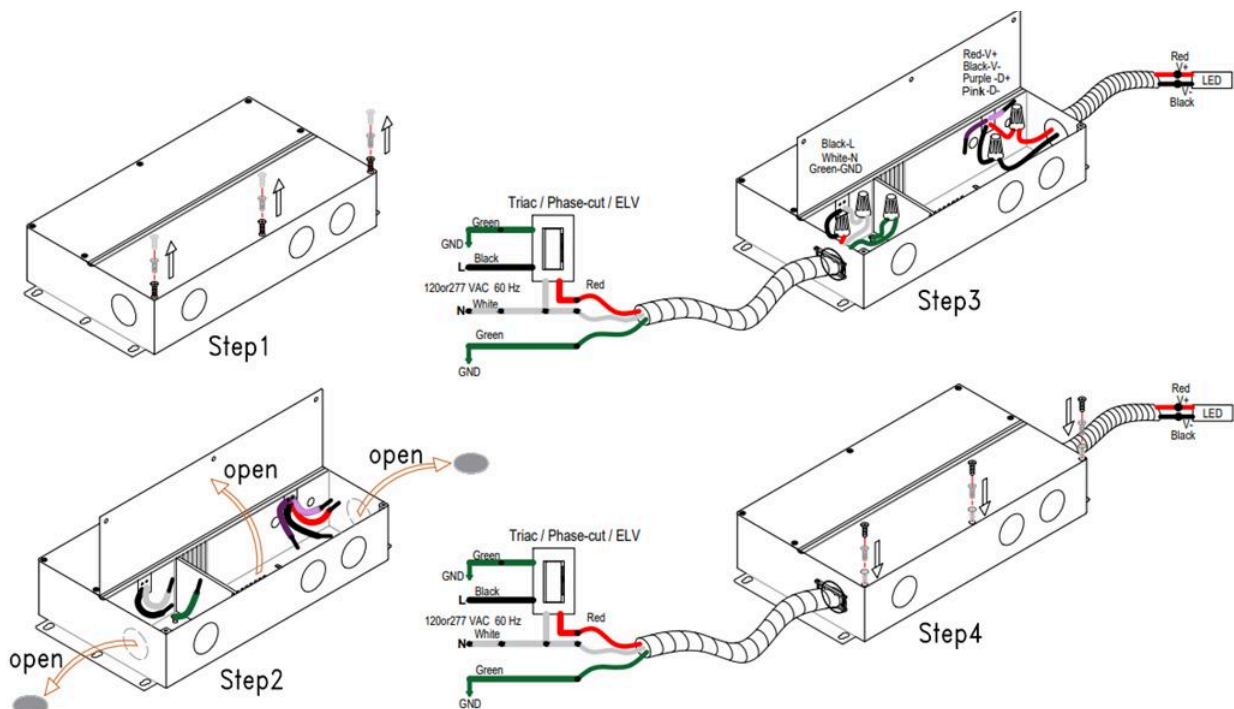


## CONNECTING DIAGRAM

Using 0-10/1-10V dimming (The power supply does not pass through the dimmer)

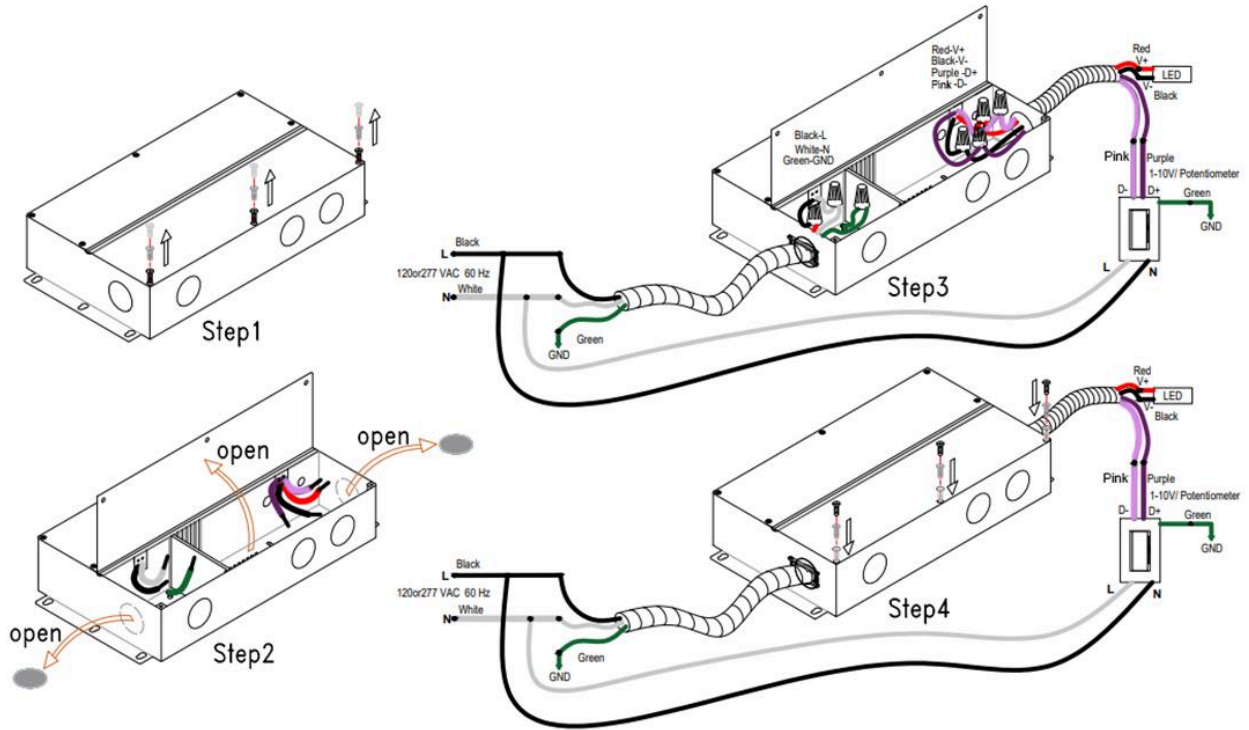


Using 0-10/1-10V dimming(Power supply through dimmer switch)

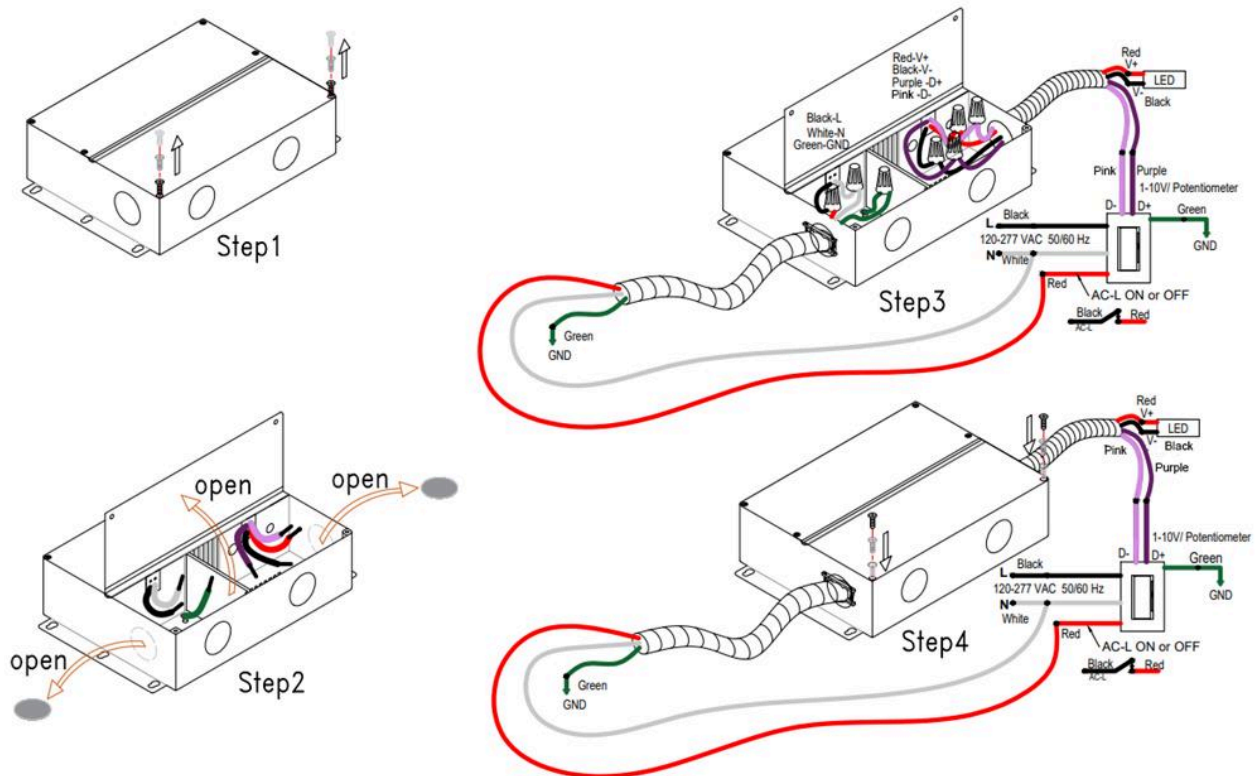


## CONNECTING DIAGRAM


Using 0-10/1-10V dimming(The dimmer is not connected to high voltage)

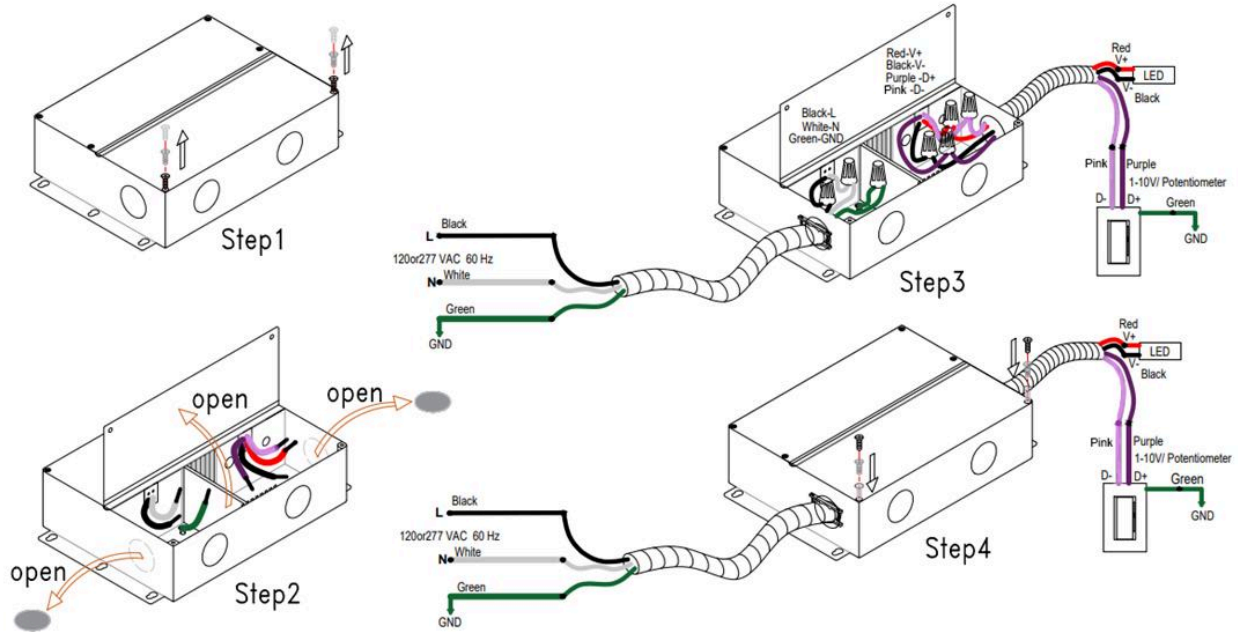

### The topology

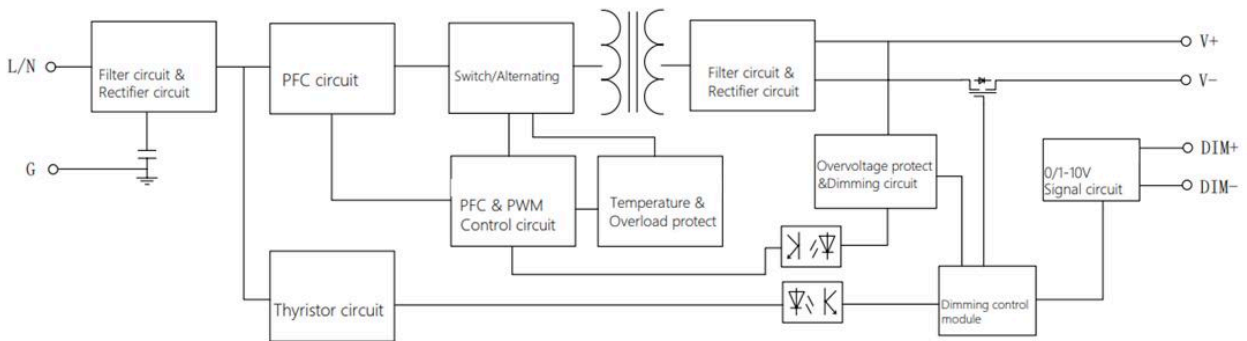


### PFC load graph

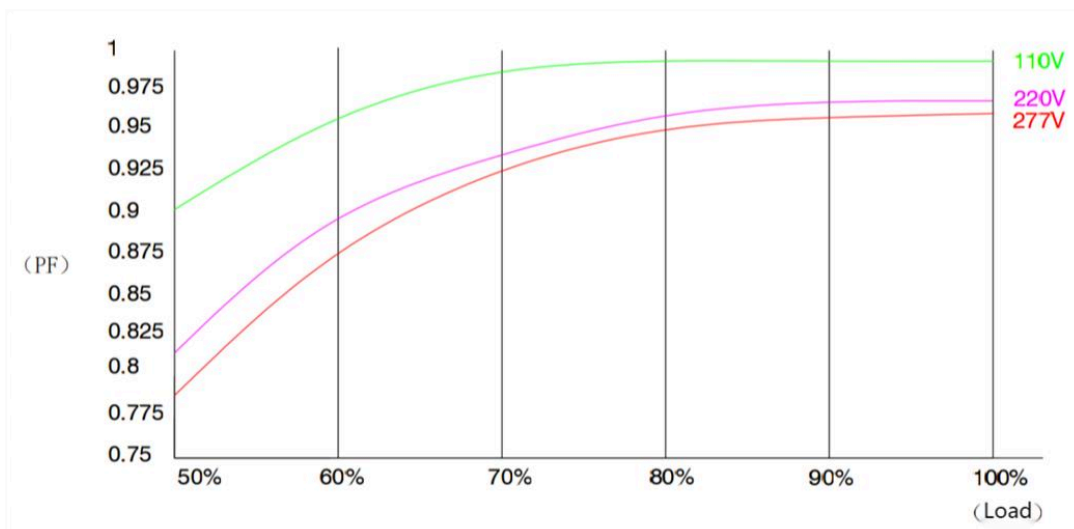


## CONNECTING DIAGRAM

### PWM dimming curve

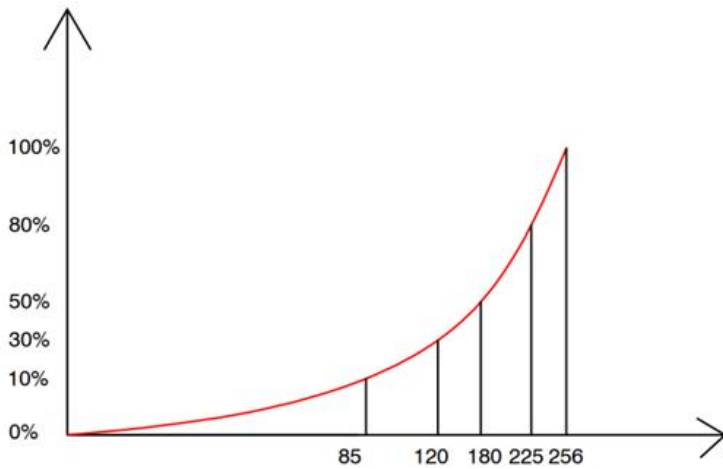


### VR dimming curve

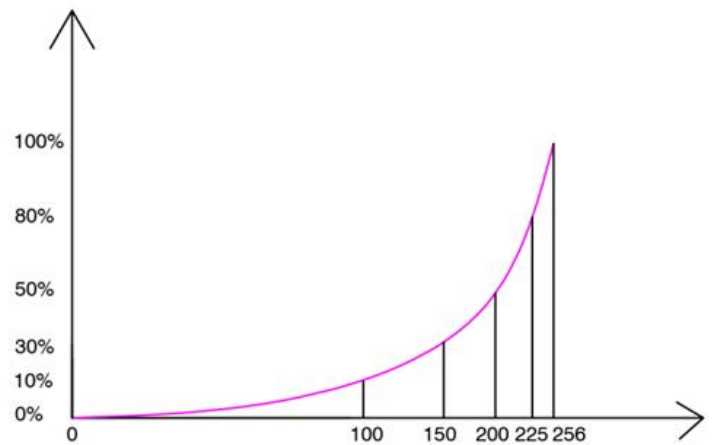

### Power supply operating temperature and life curve

(Unit: hour)

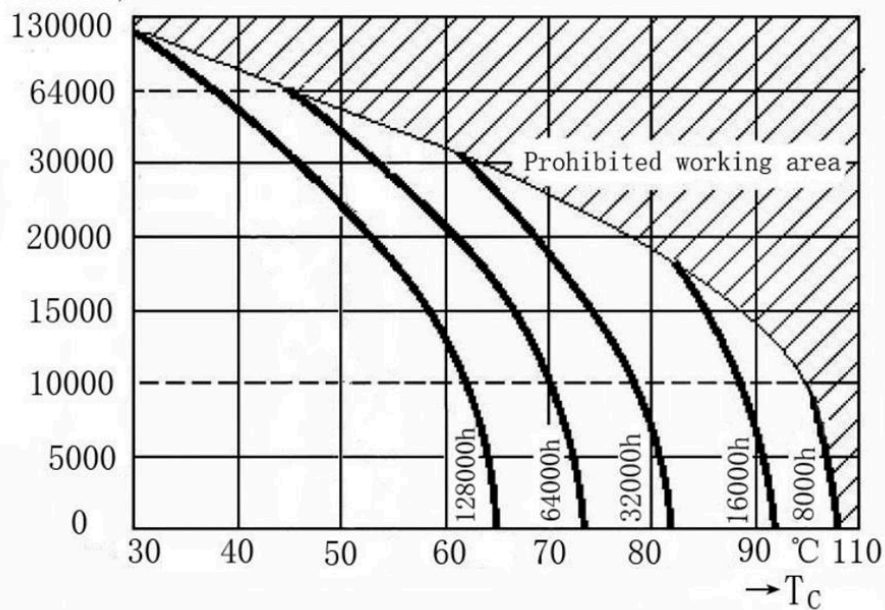

### Instruction:

1. This driver should be installed by qualified and professional person;
2. Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
3. Ensure that wiring is correct before test in order to avoid light and power supply damage;