

4W IP67/68 FLEXIBLE LED NEON SERIES

LNTV1616 is a high-lumen, high performance flexible LED fixture designed as a neon replacement and is also useful in a wide variety of indoor or outdoor applications where a smooth surface or continuous line of light is desired. The LNTV1616 is a flexible strip light that can bend around contours and tight curves without being damaged. It allows for easy installation with its factory sealed terminators and self locking male and female barrel connectors. Fully encapsulated UV protected wet location rated.



SPECIFICATIONS

INPUT VOLTAGE	24V DC Constant Voltage
POWER CONSUMPTION	4W per Ft.
LUMEN OUTPUT	279Lm/Ft.
LED CHIP	NICHIA
CRI	88+
COLOR TEMPERATURE	30K/40K/60K
DIMMING/CONTROL	MLV, ELV, 0-10 and TRIAC
MAXIMUM RUN LENGTH	32 Ft.
CUTTABLE	Every 50mm (2.19 in)
STORAGE TEMPERATURE	-40°F (-40°C) to 176°F (80°C)
OPERATING TEMPERATURE	-40°F (-20°C) to 113°F (45°C)
BEAM ANGLE	160
HUMIDITY	0-95% Non Condensing
IP RATING	IP67/IP68
CERTIFICATIONS	UL Listed
LUMEN MAINTENANCE	50,000 Hrs

FEATURES

- High color consistency
- Smooth illumination
- Multiple CCT options available
- Continuous run length up to 32 Ft.
- Bottom, Side and End feed options
- UL Listed (US and Canada)






Model	COLOR TEMP	LENGTH	VOLTAGE	SURFACE
LNTV-1616	30K 3000K	32 32 Ft.	24V 24V DC	HB Horizontal Bend
	40K 4000K			VB Vertical Bend
	60K 6000K			

*1 = Custom length per FT.




18326 Gault St., Reseda, CA.91335 | www.succarled.com | 818-457-4146

DIMENSIONS

HORIZONTAL BEND

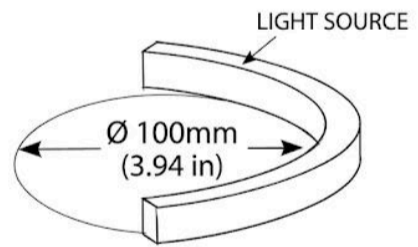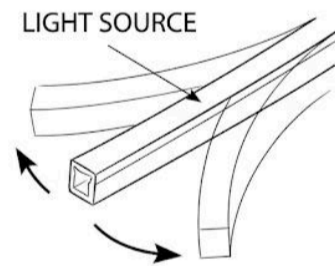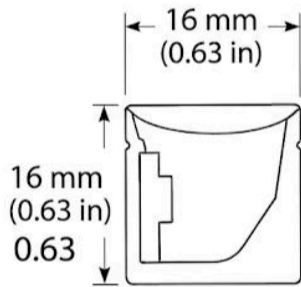

VERTICAL BEND

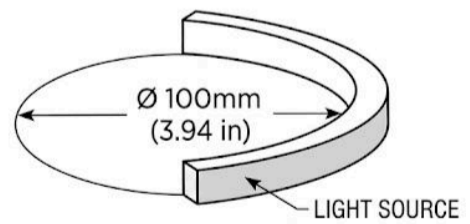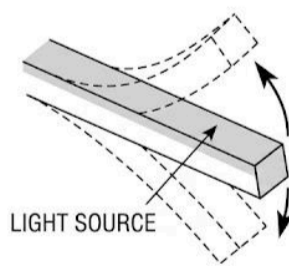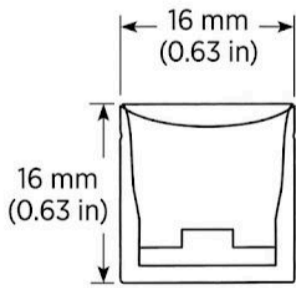

PRODUCT NAME	DESCRIPTION	ITEM	PICTURE
LN1616-CP	3.3FT/PCS ALUMINIUM CURVED PROFILE	CURVED PROFILE	
LNT1616-MC	30 MOUNTING CLIP PER REEL	MOUNTING CLIP	
LNT1616-ECH	6 PIECES PER REEL	IP67 SILICONE END CAP FOR WHT 2 PIN	
LNT1616-EC	6 PIECES PER REEL	IP67 CLOSED ENDCAP	