


4W INDOOR COB LINEAR LED STRIP

Delivering a solid stream of linear light, the **LT-COB14** features the latest in COB technology (Chip On-Board) for total linear diffusion in a low profile package.

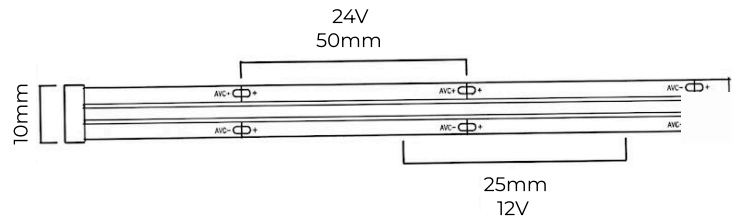

SPECIFICATIONS

INPUT VOLTAGE	24V DC
POWER CONSUMPTION	4W/Ft.
LUMEN OUTPUT	400 Lm/Ft. (30K)
CRI	90+
DIMMING	MLV, ELV, 0-10 and TRIAC
MAXIMUM RUN LENGTH	16.4 Ft
CUTTABLE	Every (50mm for 24V)/(25mm for 12V)
BINNING	2 Step Macadam Elipse
OPERATING TEMPERATURE	-40°F (-40°C) ~ +140°F (+60°C)
BEAM ANGLE	120°
IP RATING	IP20 dry location (Indoor)
CERTIFICATIONS	UL Listed
LUMEN MAINTENANCE	50,000 Hrs.
PCB Width	10mm

LUMENS

CCT	LM/ FT
2700K	400
3000K	400
3500K	400
4000K	400
5000k	400

*Approved for closet / storage space installation per NEC 410.16(A)(3) and 410.16(C)(5)



Model	COLOR TEMP	LENGTH	VOLTAGE	PROFILE
LT-COB14	27K 2700k	16 16.4 Ft.	24V 24V DC	
	30K 3000k	100 100 Ft.		
	35K 3500k	1 XX per Ft.		
	40K 4000k			
	50K 5000k			

*1 = Custom length per FT.
(Cutttable every 2")